

New Viper LSU W&D Series

- INDEX

- Product Definition
- Technical Specs
- Product Features
- Launch Date



Product definition

Model names and variants

Definition of the letters and numbers used in model names

L= Liquid

S= Suction

U= Unit

P= Plastic

1XX = 1 Motor

2XX = 2 Motor


3XX = 3 motor

X35 = 35 lt tank

X55 = 55 lt tank

X75 = 75 lt tank

X95 = 95 lt tank

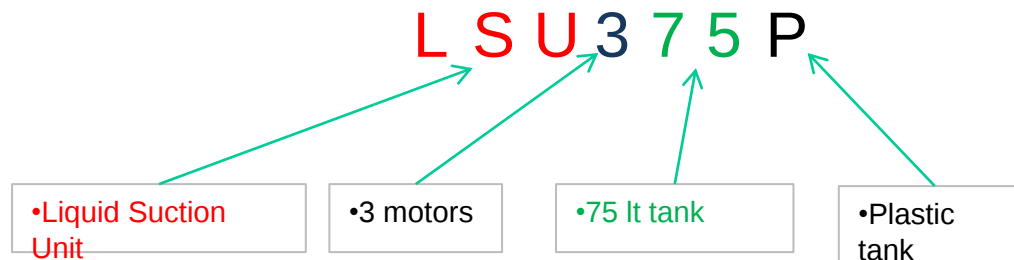

- If there is no (P) at the end of the model name,
- this means the tank is made of stainless steel

LSU135 Specs.

	50000110	50000111
	LSU 135-EU	LSU 135P-EU
CABLE LENGTH (M)	7/black	7/black
VOLTAGE (V)	220 V-240V	220 V-240V
FREQUENCY (HZ)	50-60Hz	50-60Hz
RATED POWER (W)	1000W	1000W
AIRFLOW (L/SEC)	1869L/Min	1869L/Min
VACUUM (MMH ₂ O)	1840mmH ₂ O	1840mmH ₂ O
SOUND PRESSURE LEVEL (dB(A))	74 dB(A)	74 dB(A)
TANK CAPACITY (L)	35L	35L
LENGTH X WIDTH X HEIGHT (CM)	47 x 45 x 80	47 x 45 x 80
WEIGHT (KG)	13kg	13kg

LSU155 Specs.

	50000110	50000111
	LSU 135-EU	LSU 135P-EU
CABLE LENGTH (M)	7/black	7/black
VOLTAGE (V)	220 V-240V	220 V-240V
FREQUENCY (HZ)	50-60Hz	50-60Hz
RATED POWER (W)	1000W	1000W
AIRFLOW (L/SEC)	1869L/Min	1869L/Min
VACUUM (MMH ₂ O)	1840mmH ₂ O	1840mmH ₂ O
SOUND PRESSURE LEVEL (dB(A))	74 dB(A)	74 dB(A)
TANK CAPACITY (L)	35L	35L
LENGTH X WIDTH X HEIGHT (CM)	47 x 45 x 80	47 x 45 x 80
WEIGHT (KG)	13kg	13kg

LSU 255 Specs.

	50000126 LSU 255-EU	50000127 LSU 255P-EU
CABLE LENGTH (M)	8/black	8/black
VOLTAGE (V)	220 V-240V	220 V-240V
FREQUENCY (HZ)	50-60Hz	50-60Hz
RATED POWER (W)	2000W	2000W
AIRFLOW (L/SEC)	3115L/Min	3115L/Min
VACUUM (MMH ₂ O)	2005mmH ₂ O	2005mmH ₂ O
SOUND PRESSURE LEVEL (dB(A))	78dB(A)	78 dB(A)
TANK CAPACITY (L)	55L	55L
LENGTH X WIDTH X HEIGHT (CM)	63.4 x 58.6 x 94.8	63.4 x 58.6 x 94.8
WEIGHT (KG)	24.5kg	24.5kg

LSU275 Specs.

	50000134	50000135
	LSU 275-EU	LSU 275P-EU
CABLE LENGTH (M)	8/black	8/black
VOLTAGE (V)	220 V-240V	220 V-240V
FREQUENCY (HZ)	50-60Hz	50-60Hz
RATED POWER (W)	2000W	2000W
AIRFLOW (L/SEC)	3115L/Min	3115L/Min
VACUUM (MMH ₂ O)	2005mmH ₂ O	2005mmH ₂ O
SOUND PRESSURE LEVEL (dB(A))	78dB(A)	78 dB(A)
TANK CAPACITY (L)	75L	75L
LENGTH X WIDTH X HEIGHT (CM)	63.4 x 58.6 x 98.8	63.4 x 58.6 x 98.8
WEIGHT (KG)	25kg	25kg

LSU375 Specs.

	50000140	50000141
	LSU 375-EU	LSU 375P-EU
CABLE LENGTH (M)	8/black	8/black
VOLTAGE (V)	220 V-240V	220 V-240V
FREQUENCY (HZ)	50-60Hz	50-60Hz
RATED POWER (W)	3000W	3000W
AIRFLOW (L/SEC)	3540L/Min	3540L/Min
VACUUM (MMH ₂ O)	2020mmH ₂ O	2020mmH ₂ O
SOUND PRESSURE LEVEL (dB(A))	79dB(A)	79dB(A)
TANK CAPACITY (L)	75L	75L
LENGTH X WIDTH X HEIGHT (CM)	63.4 x 58.6 x 98.8	63.4 x 58.6 x 98.8
WEIGHT (KG)	28kg	28kg

LSU395 Specs.

	50000150	50000151
	LSU 395-EU	LSU 395P-EU
CABLE LENGTH (M)	10/black	10/black
VOLTAGE (V)	220 V-240V	220 V-240V
FREQUENCY (HZ)	50-60Hz	50-60Hz
RATED POWER (W)	3000W	3000W
AIRFLOW (L/SEC)	3540L/Min	3540L/Min
VACUUM (MMH ₂ O)	2020mmH ₂ O	2020mmH ₂ O
SOUND PRESSURE LEVEL (dB(A))	79dB(A)	79dB(A)
TANK CAPACITY (L)	95L	95L
LENGTH X WIDTH X HEIGHT (CM)	63.4 x 58.6 x 112	63.4 x 58.6 x 112
WEIGHT (KG)	29.3kg	29.3kg

Product Features



•**Important Note** : Filter should stay inside the machine both during wet and dry applications.

- Launch Date for EMEA (Europe) is September 2012
- Launch Date for APAC is August 2012

